
130 Polyplush™



- Vinyl backing is moisture resistant, slip resistant and will not stain floor.
- For placement inside entrances of schools, offices, shops.
- Vacuum clean.
- Free of toxic DOP and DMF.

130 Polyplush™

			PRODUCT SPECIFICATIONS		
Designation	n	Dust Control Matting			
Description		Absorbent carpet mat			
Material					
Top Tufte			ufted cut pile carpet made of 100% Decalon® yarns. 00 grams of yarn per m².		
	Backing	Black vinyl			
Process		Needle punch			
Category		Indoor absorbent - Bestseller			
Recommended use		Indoor - light to medium traffic conditions			
Colours		Brown, Grey, Red-Black, Green, Navy Blue			
Weight		3 kg/m ²			
Thickness		6.5 mm			
Standard sizes		60 cm x 90 cm 90 cm x 120 cm 90 cm x 150 cm 90 cm x 300 cm 120 cm x 180 cm 120 cm x 240 cm 90 cm x 18.3 m 120 cm x 18.3 m 180 cm x 18.3 m			
Custom sizes 90 cm, 120 cm and 18) cm per linear meter		
'			recommended. Tolerance : + 2.5 cm / -5 cm		
r		11 9 9 11	PRODUCT TESTING		
Tests		Norms	Results		
Abrasion resistance			ASTM D3884	3.7 g weight loss	
Colour fastness to light		ıt	AATCC 16E	9 9	
Accelerated wear test by sim floor machine			U.S.		
Accelerated soiling			ASTM 6540	3,3	
Anti-slip			DIN51130 - BGR181		
Water retention			ISO 4920 TNO W6034	4.1 l/m ²	
Sanitary epidemiologic test		c test	GN 2.1.6.1338-03 MCL GN 2.1.6.2309-07 OBUV	Pass - Certificate no. 77.01.16.229.P.044984.07.09	
Graves tear	rstrength				
Breaking load			ASTM D412	123,4 lb/in²	
Elongation			38,02%		
Hexapod tumble drum tester		n tester	ASTM D5252	Appearance rating 3	
				Colorchange 3,5	
			FIRE TESTING		
		Surface Flammability	ASTM D2859	Pass	
		Classification of the reaction to fire performance	DIN EN 13501-1		
Sustainability		Recyclable material REACH compliant (Registration, Evaluation, Authorization and restrictions of Chemicals) Contributes to cleaner environment by reducing need of cleaning chemicals			

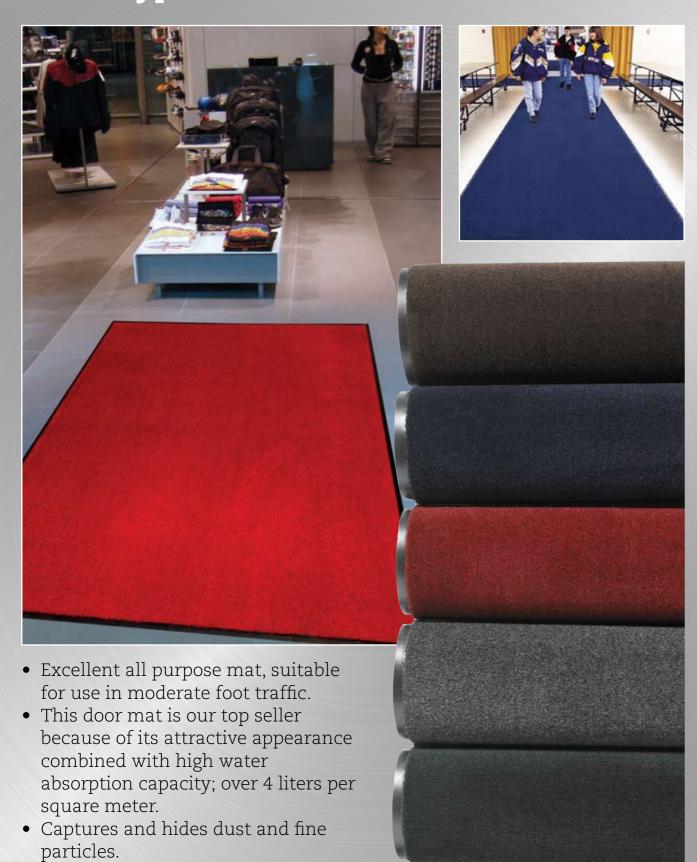